


**20V/90A N-Channel Enhancement Mode MOSFET****Features**

- Good stability and uniformity
- 100% avalanche tested
- Excellent package for good heat dissipation

BVDSS	20	V
ID	90	A
RDSON@VGS=4.5V	3.2	mΩ
RDSON@VGS=2.5V	4	mΩ

Applications

- Battery protection
- Load switch
- Uninterruptible power supply

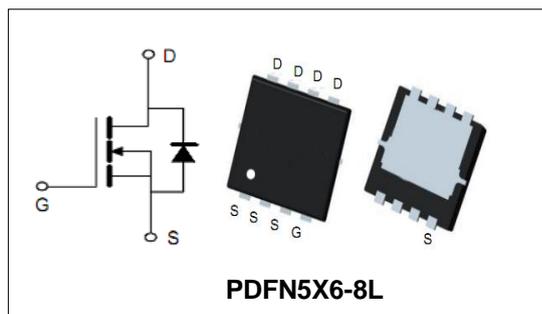**Order Information**

Product	Package	Marking	Reel Size	Reel	Carton
PTN90N02	PDFN5X6-8L	PTN90N02	13inch	5000PCS	50000PCS

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit	
Common Ratings (TC=25°C Unless Otherwise Noted)				
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	20	V	
V_{GS}	Gate-Source Voltage	±12	V	
T_J	Maximum Junction Temperature	150	°C	
T_{STG}	Storage Temperature Range	-55 to 150	°C	
I_S	Diode Continuous Forward Current	$T_A = 25^\circ C$	65	A
Mounted on Large Heat Sink				
E_{AS}	Single Pulse Avalanche Energy (Note1)	112	mJ	
I_{DM}	Pulse Drain Current Tested (Silicon Limit) (Note2)	$T_A = 25^\circ C$	360	A
I_D	Continuous Drain current	$T_A = 25^\circ C$	65	A
P_D	Maximum Power Dissipation	$T_C = 25^\circ C$	59	W
$R_{\theta Jc}$	Thermal Resistance Junction-to-Case (Note3)	2.12	°C/W	



20V/90A N-Channel Enhancement Mode MOSFET

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ T_J = 25°C (unless otherwise stated)						
V _{(BR)DSS}	Drain- Source Breakdown Voltage	VGS=0V ID=250μA	20	--	--	V
I _{DSS}	Zero Gate Voltage Drain current	VDS=20V,VGS=0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	VGS=±12V,VDS=0V	--	--	±100	nA
V _{GS(TH)}	Gate Threshold Voltage	VDS=VGS,ID=250μA	0.5	--	1	V
R _{DS(ON)}	Drain-Source On-State Resistance (Note4)	VGS=4.5V, ID=30A	--	3.2	4	Ω
R _{DS(ON)}	Drain-Source On-State Resistance (Note4)	VGS=2.5V, ID=20A	--	4	6	Ω
Dynamic Electrical Characteristics @ T_J = 25°C (unless otherwise stated) (Note5)						
C _{iss}	Input Capacitance	VDS=10V, VGS=0V, F=1MHz	--	3100	--	pF
C _{oss}	Output Capacitance		--	460	--	pF
C _{rss}	Reverse Transfer Capacitance		--	437	--	pF
Q _g	Total Gate Charge	VDS=10V, ID=30A, VGS=4.5V	--	47	--	nC
Q _{gs}	Gate-Source Charge		--	6.5	--	nC
Q _{gd}	Gate-Drain Charge		--	19	--	nC
Switching Characteristics (Note5)						
t _{d(on)}	Turn-on Delay Time	VDS=10V, ID=30A, RG=1.8Ω, VGS=4.5V	--	9.8	--	nS
t _r	Turn-on Rise Time		--	36	--	nS
t _{d(off)}	Turn-off Delay Time		--	62	--	nS
t _f	Turn-off Fall Time		--	51	--	nS
Source- Drain Diode Characteristics @ T_J = 25°C (unless otherwise stated)						
V _{SD}	Forward on voltage	IS=10A,VGS=0V	--	--	1.2	V
t _{rr}	Reverse Recovery Time	IF=20A, di/dt=100A/us	--	25	--	ns
Q _{rr}	Reverse Recovery C		--	24	--	nC

Note:

- Limited by T_{Jmax}, starting T_J = 25° C, R_G = 4.5Ω, V_D =15V, V_{GS} =10V. Part not recommended for use above this value.
- Repetitive Rating: Pulse width limited by maximum junction temperature.
- Surface Mounted on FR4 Board, t ≤ 10 sec.
- Pulse Test: pulse width ≤ 300 us, duty cycle ≤ 2%.
- Guaranteed by design, not subject to production testing.



20V/90A N-Channel Enhancement Mode MOSFET

Typical Performance Characteristics

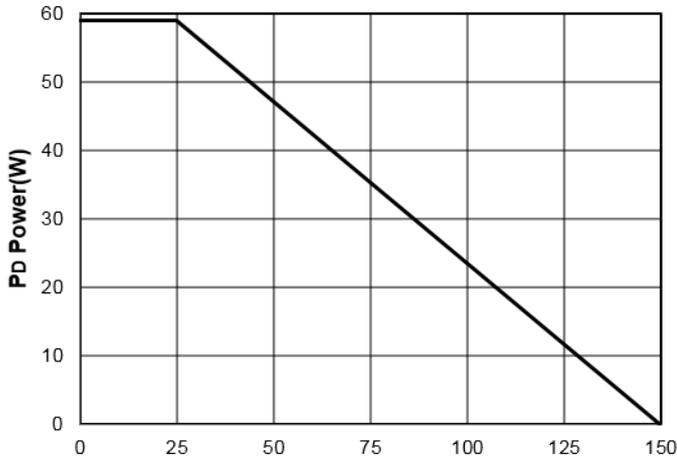


Figure1: Tj Junction Temperature (°C)

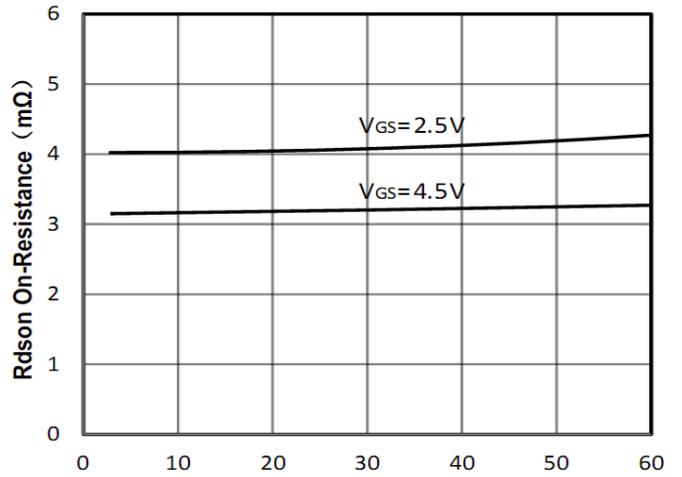


Figure2: Id Drain Current (A)

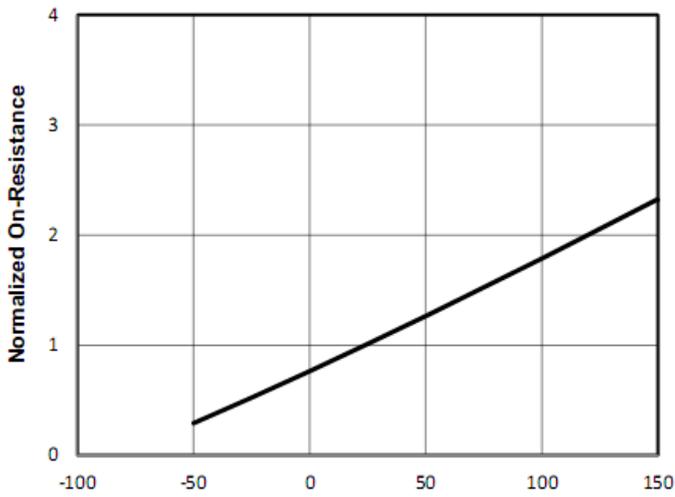


Figure3: Tj Junction Temperature (°C)

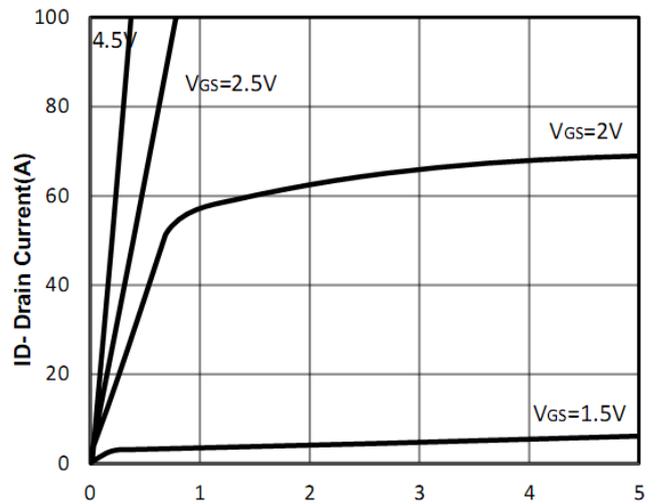


Figure4: Vds Drain-Source Voltage (V)

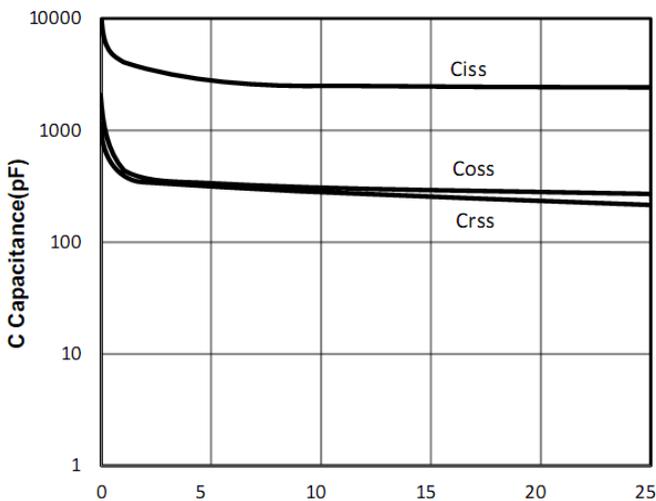


Figure5: Vds Draun-Source Voltage (V)

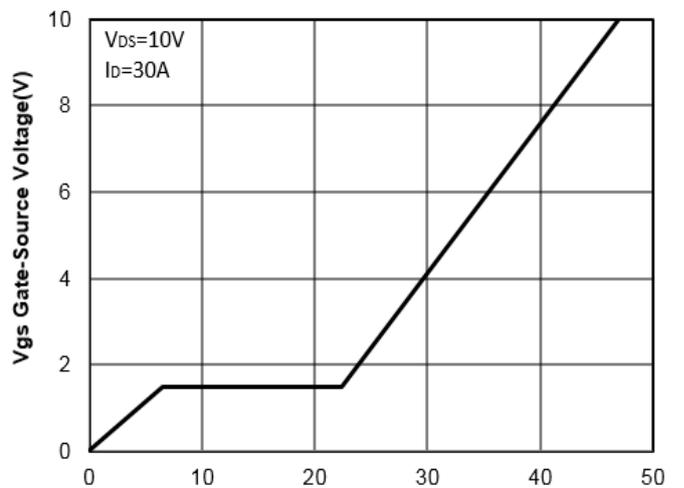


Figure6: Qg Gate Charge (nC)



20V/90A N-Channel Enhancement Mode MOSFET

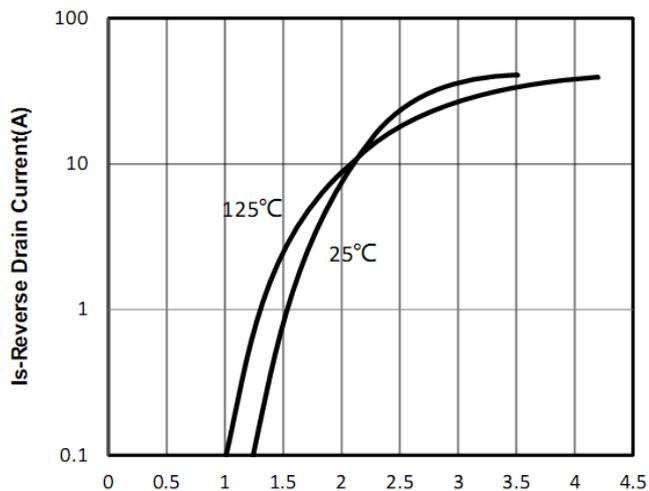


Figure7: Vsd Source-Drain Voltage (V)

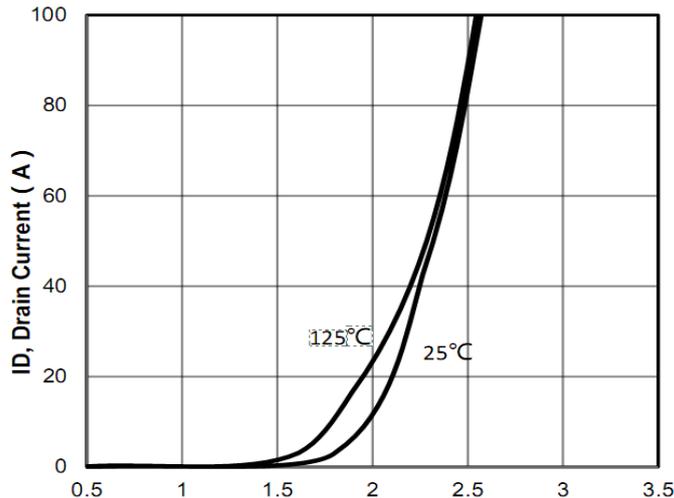


Figure8: Vgs Gate-Source Voltage (V)

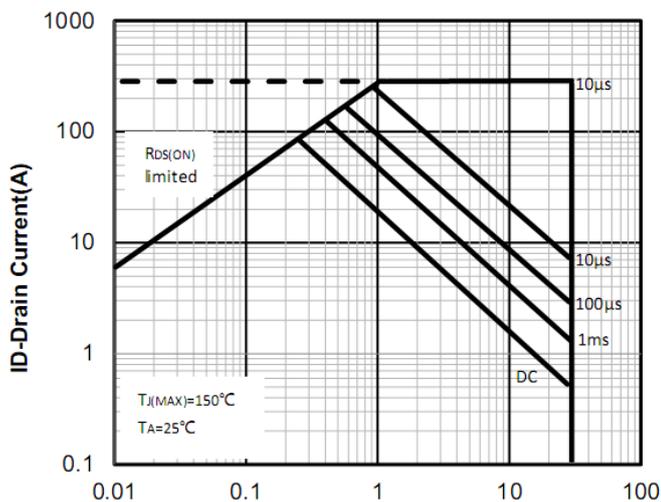


Figure9: Vsd Drain-Source Voltage (V)

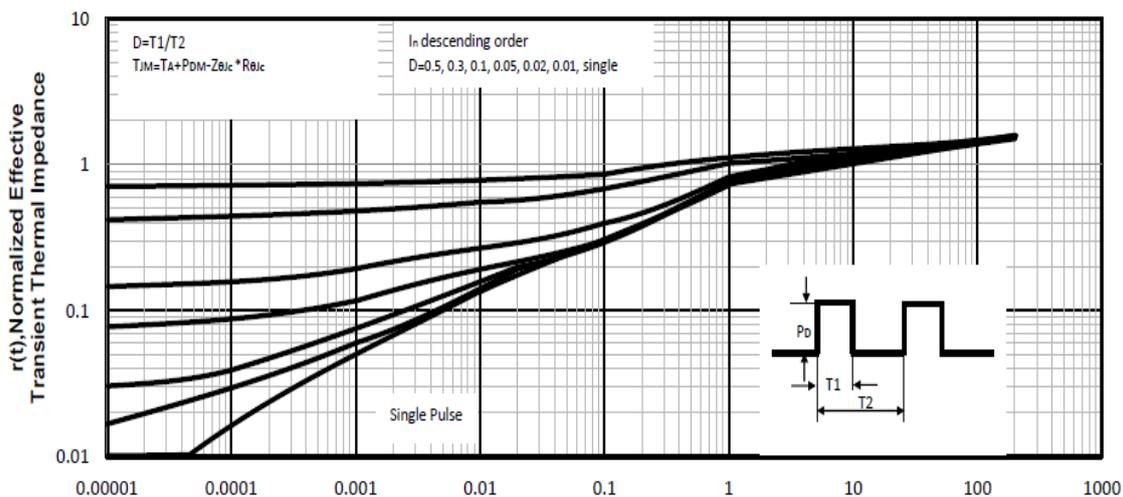
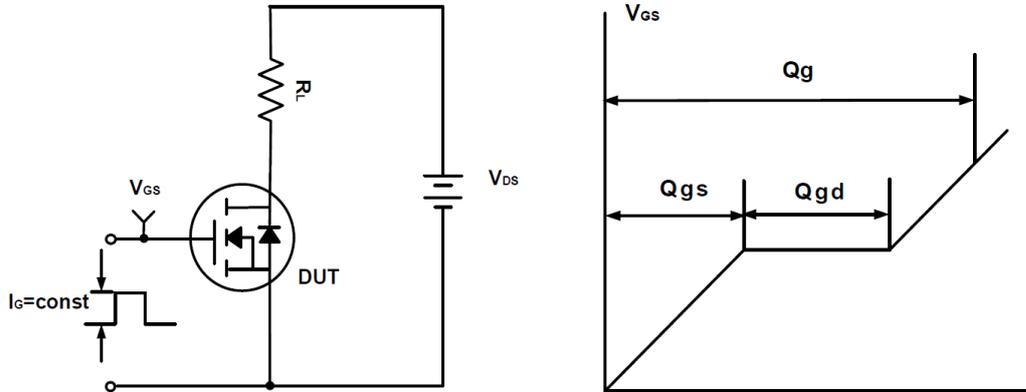
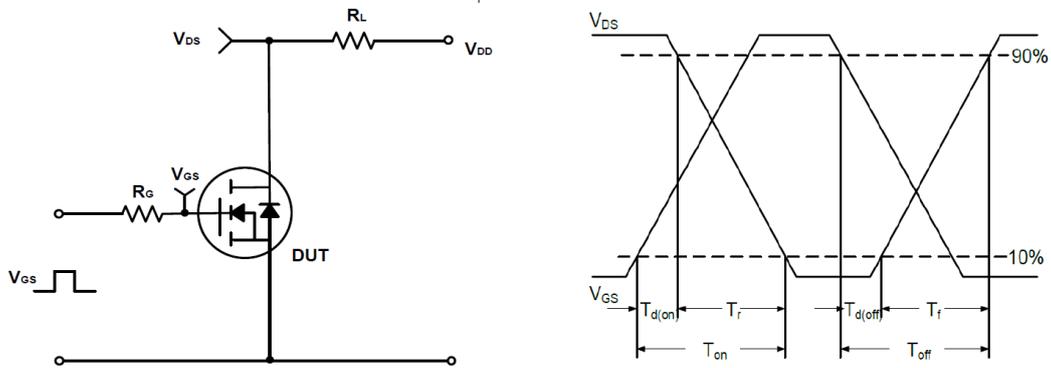
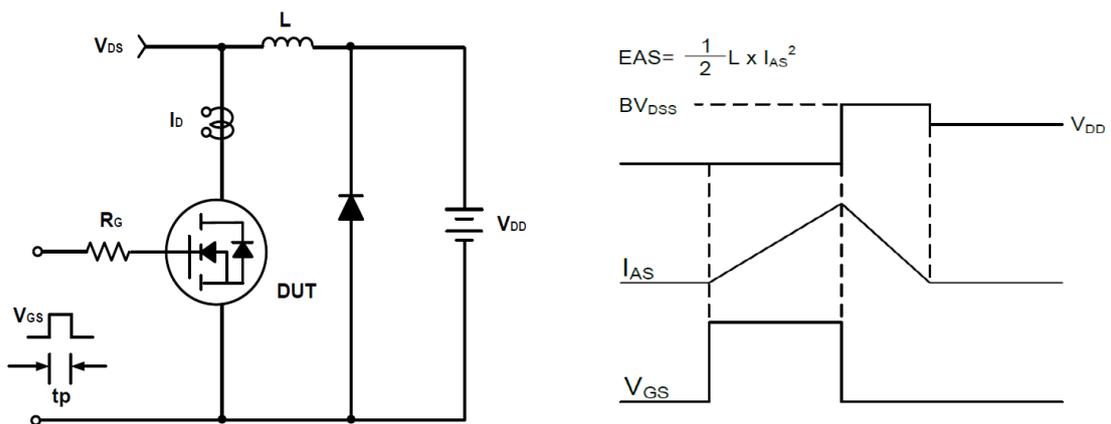
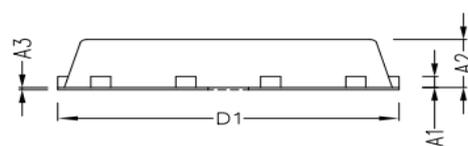
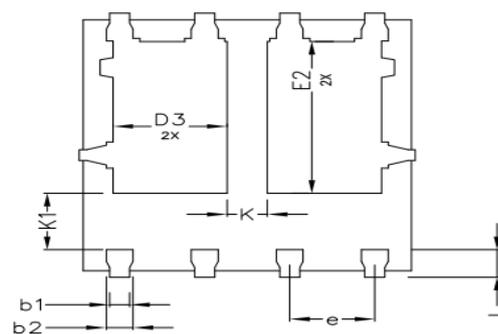
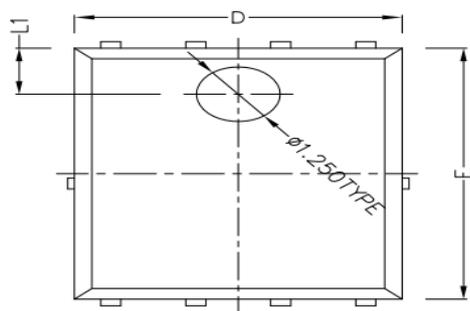


Figure10: Square Wave Pulse Duration (sec)


20V/90A N-Channel Enhancement Mode MOSFET
Test Circuit and Waveform:

Figure A Gate Charge Test Circuit & Waveforms

Figure B Switching Test Circuit & Waveforms

Figure C Unclamped Inductive Switching Circuit & Waveforms

20V/90A N-Channel Enhancement Mode MOSFET
PDFN5X6-8L Package Outline Dimensions (Units: mm)


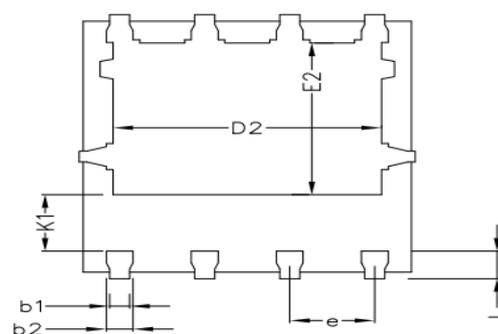
SIDE VIEW


 BOTTOM VIEW
OPTION 2


TOP VIEW



SIDE VIEW


 BOTTOM VIEW
OPTION 1

COMMON DIMENSIONS (UNITS OF MEASURE IS mm)			
	MIN	NORMAL	MAX
A1	0.254 BSC		
A2	1.000	1.100	1.200
A3	0.005	-	0.020
b1	0.250	0.300	0.350
b2	0.350	0.400	0.450
D	4.800	4.900	5.000
D1	5.000	5.100	5.200
D2	3.910	4.010	4.110
D3	1.605	1.705	1.805
E	5.650	5.750	5.850
E1	5.950	6.050	6.150
E2	3.375	3.475	3.575
e	1.270 TYPE		
L	0.530	0.630	0.730
L1	1.00REF		
θ	13° TYPE		
K	0.600 REF		
K1	1.235 REF		